


20SYL-14A

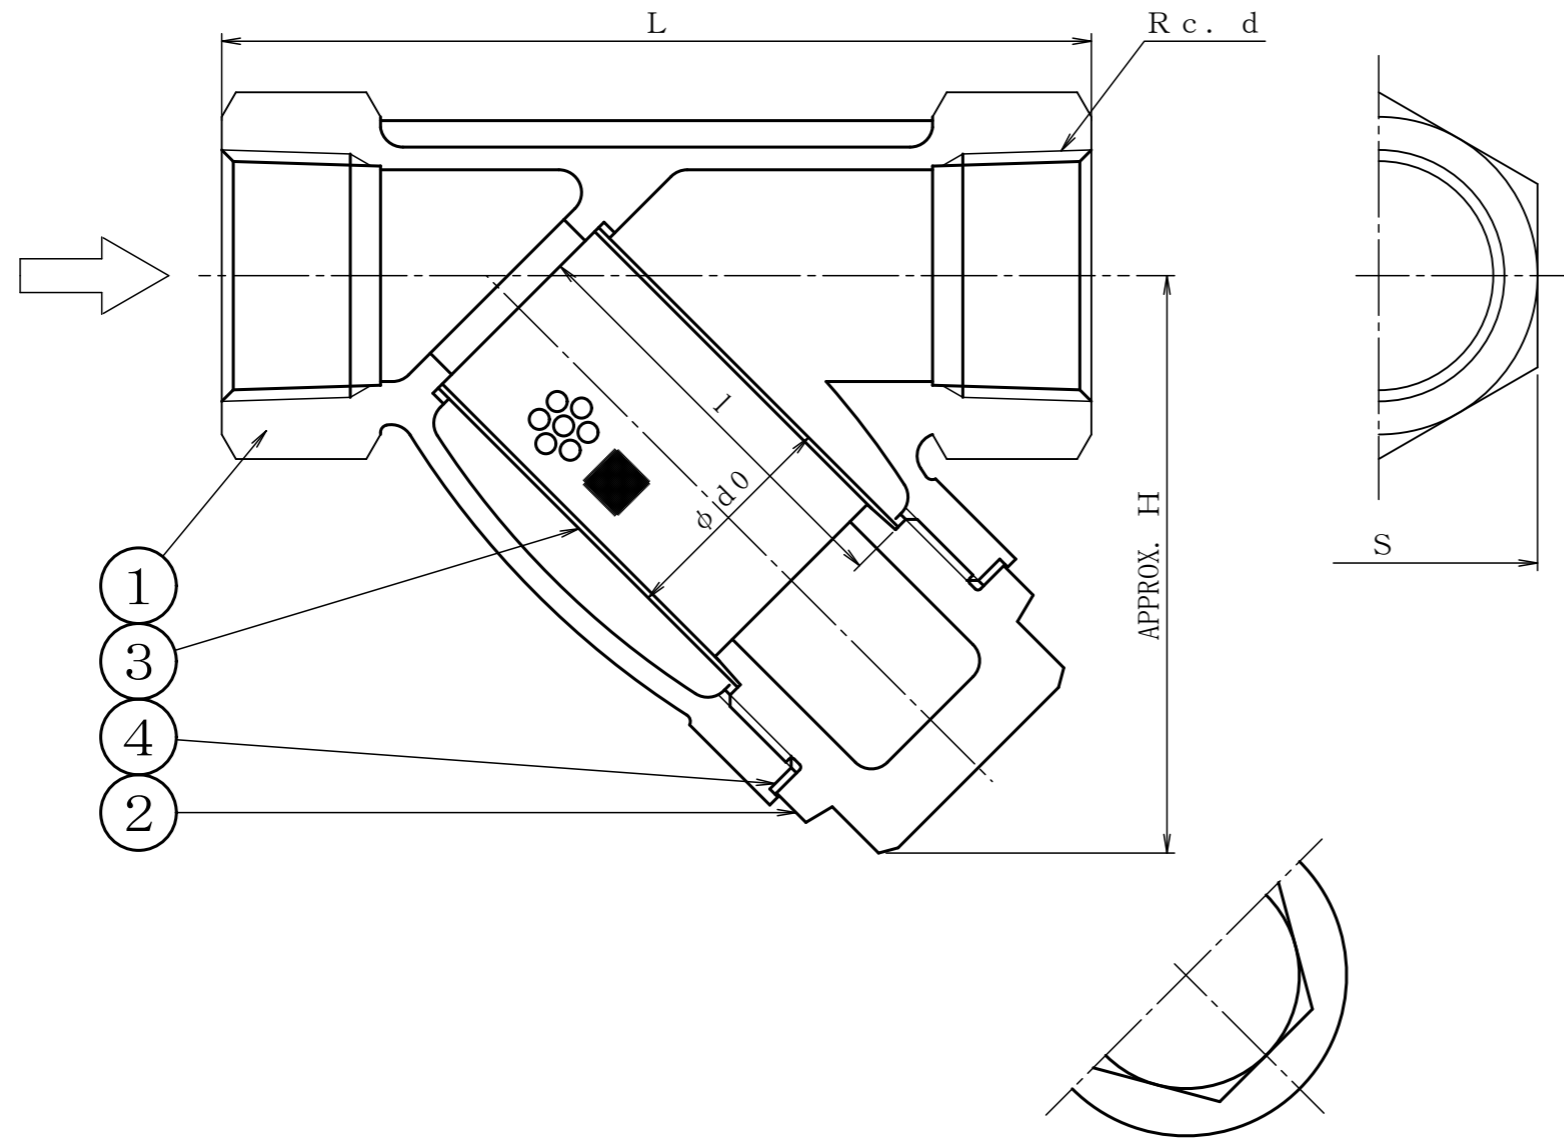

SIZE	R c. d	L	H	d0	l	S			
3/8	10	3/8	70	45	13	30	23		
1/2	15	1/2	85	55	18	40	28		
3/4	20	3/4	100	70	23	52	34		
1	25	1	115	80	30	56	42		
1 1/4	32	1 1/4	135	95	37	68	52		
1 1/2	40	1 1/2	150	100	43	71	58		
2	50	2	180	115	53	82	72		

SCREEN

	MESH
	20 MESH
	40 MESH
	60 MESH
	80 MESH
	100 MESH

No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS
4	GASKET	T#9007-G20	1	
3	SCREEN	SUS316	1	
2	CAP	SCS14A	1	
1	BODY	SCS14A	1	

NAME 20K

SCREWED Y TYPE STRAINER

FLUID		TEST PRESSURE	BODY	(HYD) 3.0 MPaG
			SEAT	(AIR) MPaG
DESIGN PRESSURE	2.0 MPaG			(HYD) MPaG
				(AIR) MPaG
DESIGN TEMPERATURE	150 °C			(HYD) MPaG
				(AIR) MPaG

DRAWING No _____ MODEL No 20SYL-14A

DATE	A. P	C. K	D. S	D. W
AUG. 31, 2017	MORITA	MORITA	MORITA	HISAKA

MM THREE-M INDUSTRY CO., LTD.

No	DESCRIPTION	DATE	A. P	C. K	D. W
REVISIONS					